

Owners Manual

Pro-Line 210

Table of Contents

II Introduction Pg. 4

Dealer - Customer responsibilities

Registration

Insurance

III Safety Pg. 5

Regulations

Equipment

Passenger safety

Rules of the road

Hazardous conditions

Alcohol

IV Controls, and Systems Pg. 6

Ignition

Choke

Safety shut down

Shift / Throttle / Trim

Steering

Instruments: Fuel Gauge, Water Temperature, Volt,
Tachometer, Speedometer, Trim, Options

Switches: Windshield Wipers, Bilge Pump, Blower, Lights, Trim,

Systems: Fuel/ Oil, Fresh Water, Sea Water, Head/ Waste, Electrical,
Water - After Market Accessories

V Trailering and Launching Pg. 11

Classification and Capacity

Hitch

Load Distribution

Launching and Retrieving

VI Operation and Performance Pg. 13

Loading

Fueling

Starting

Torque

Trim

Prop

VII Service and Care Pg. 17

Fberg ass - Gel coat

Maintenance

Plexiglass
Stainless Steel/ Aluminum
Canvas
Upholstery Vinyl, Fabric
Corrosion Protection
Winterization, Storage, Mooring

VIII Appendix Pg 21

Boat ID
Trouble Shooting Chart
Nautical Terms
Warranty
Wiring Diagrams

List of Illustrations

Fig 1 Helm Pg. 8
Fig 2 Bilge / Fuel Pg 10
Fig 3 Water Systems Pg 11
Fig 4 Trim Condition Pg 16
Specifications Pg 25
Wiring Diagrams Pg 27

Introduction

Congratulations! You are now the proud owner of a new Pro-Line. Welcome into our ever expanding family of satisfied Pro-Line owners. Every journey lets you enjoy the excitement of a new adventure. Your new Pro-Line is more than just a boat it's a way of living.

Pro-Line employee commitment to excellence has enabled us to create a superior fishing craft, providing you with comfort, performance, safety and dependability. All of our boats comply with U.S. Coast Guard (USCG) safety standards, and are designed, engineered and crafted in accordance with recommendations and guidelines set forth by the National Marine Manufacturers Association (NMMA) and the American Boat and Yacht Council (ABYC).

This manual (to be kept onboard your Pro-Line) is designed to provide you with information necessary for safe, efficient operation and care of your new Pro-Line. To maximize your enjoyment and safety take the time now to carefully review the documentation in your owners pack and this manual, and get to know your boat.

Dealer Responsibilities

Your dealer's responsibilities include but are not limited to:

- * Pre-delivery verification of proper rigging and operation
- * Providing adequate orientation in general operation of your Pro-Line including explanation of specific safety considerations regarding the use of systems and components
- * An explanation of owners packet literature and warranty registration cards for all separately warranted equipment and accessories
- * Explaining local and out of area service procedures during and out of warranty periods

Customer Responsibilities

- * Be proficient in boat handling and safety - **THIS MANUAL IS NOT INTENDED TO PROVIDE COMPLETE TRAINING ON ALL ASPECTS OF GENERAL BOAT OPERATION.**
- * Read and understand the limited warranty
- * Read all literature and instructions and use all equipment in accordance therewith
- * Examine the boat at time of delivery to ensure that all systems are functioning normally
- * Learn about and operate boat in accordance with local, state and federal laws regulations and registration requirements
- * The owner is legally responsible for all liabilities of operation and insurance protection

Safety

Your Pro-Line boat has been constructed with safety in mind, however the ultimate safety of you and your passengers is in your hands. Plan your trips carefully. Tell someone where you are going and when you expect to return.

Regulations

The USCG is the authority of all the waterways. State boating regulations are enforced by local authorities. You are subject to marine traffic laws and "Rules of the Road" for both federal and state waterways, and must submit to boarding if requested by proper authority.

There are many publications available from the Coast Guard concerning regulations, and more. For additional information call the boating safety hot line at 1(800)368-5647.

Equipment

USCG regulations require the following equipment while operating your boat:

- * Fire extinguisher
- * Personal Flotation Device (PFD) for each occupant
- * One throwable PFD
- * Sound signal device
- * Navigational lights if operated at night
- * Sight signal (flare- night, orange flag- day) if operating in coastal waters or great lakes

In addition, here is a list of suggested equipment you should have aboard your Pro-Line:

- * First aid kit and blankets
- * Mooring lines and fenders
- * Combination oar / boat hook
- * Spare prop. nut & washer
- * Spare fuses and bulbs
- * Local charts and compass
- * 2 way radio (with proper license)
- * Floating key chain & spare keys
- * Emergency food and water
- * Grounding & sea anchors with line
- * Bailing device
- * Tool kit and lubricant
- * Spare fasteners, hose clamps, plugs
- * Binoculars or telescope
- * Water proof flashlight
- * EPIRB
- * Navigation device
- * Water proof matches or lighter

Passenger Safety

You are responsible for the safety and conduct of your passengers, make sure:

- * You instruct passengers on proper use and location of PFD's - children and non-swimmers should wear one at all times
- * When underway each passenger is in a safe location, and keeps the boat balanced.

- * At least one other person knows how to operate the boat in case of emergency
- * They are aware of dangers of the prop. and the possibility of sudden maneuvers and jolts

Rules of the Road

Know and follow the rules of the road. the information here is only a brief overview. For detailed information contact the USCG

Audible warning signals

- * One short horn blast: starboard course change
- * Two short horn blasts: port course change
- * Three short horn blasts: astern operation.
- * Five horn blasts: doubt about previous signal, or danger
- * One Five second blast every minute for fog operation.

When overtaking give- way vessel announces intention with horn blast(s) and waits for same response, then completes maneuver

When approaching head on both boats give way after giving appropriate horn blast (preferable to starboard)

When crossing a vessel converging from starboard has right of way, port vessel gives way (both acknowledge with one short horn blast)

Know and observe navigational buoys and markers.

Give way to craft under sail

Hazardous Conditions

Keep track of weather developments and avoid hazardous conditions if possible

When forced to operate your Pro-Line in storm conditions:

- * Wear PFD's
- * Stow loose gear and equipment
- * Place heavy items as low as possible
- * Head for the easiest to reach safe location
- * Reduce speed
- * If power fails rig a sea anchor off the bow (an empty ice chest in a pinch)
- * Stay with boat if it capsizes, unless it is burning out of control

Alcohol

Simple. **don't drink and drive**. If you have been drinking have someone drive who has not been drinking

Carbon Monoxide

Be aware of and avoid conditions that can cause carbon monoxide poisoning (see USCG boating safety circular ??). Sources of carbon monoxide include any gas or diesel engine, any flame such as a charcoal grill, stove or heater. Carbon monoxide

can accumulate to deadly levels in enclosed spaces. Always ventilate occupied areas of vessel with fresh air.

Fire

Be aware of and avoid conditions that lead to accidental fire. Guard against and watch for fuel spills and leaks. Inspect wiring for damage or exposure that could lead to short circuits or arcing. Make sure those who smoke are vigilant against their ignition source starting a fire. Don't allow smoking while fueling. Keep a USCG approved fire extinguisher aboard at all times. Inspect the fire extinguisher regularly. Learn how (and instruct others) to properly use it. Only use water to fight a fire as a last resort and then only after making arrangements to abandon the boat if a fire should start and get out of control.

If a fire is burning out of control and you must abandon the boat keep the following in mind:

- * Abandon the boat into the wind to minimize burn risk from floating fuel
- * Wear a PFD unless you must swim under burning fuel
- * If swimming under burning fuel throw a PFD outside of the burning area and swim under the burning fuel to it

Flooding

Be aware of and avoid conditions that can cause your boat to flood with water. Possible causes of flooding include: damage to hull or thru-hull fitting, waves washing into the boat, water entering cockpit due to improper loading.

If you allow water to enter the boat faster than the bilge pump can expel it, the boat will become flooded and may swamp, capsize, or sink.

Controls and Systems


Pro-1 line Boats offer many different engine and drive unit choices, therefore the information in this manual is general in regards to engine and controls. Refer to the engine/ drive manuals in your owners packet for additional, specific information.

Ignition

The ignition switch has three positions, off, on, start. To start the engine, turn the key clockwise against the spring pressure to the start position, as soon as the engine starts release clockwise pressure allowing spring tension to return switch to the on position. If the engine fails to start in 5 seconds of cranking allow the starter to cool 10 seconds and repeat.

Choke

The choke is only used to aid in starting a cold engine. Operation varies with manufacture. Consult your engine manual.

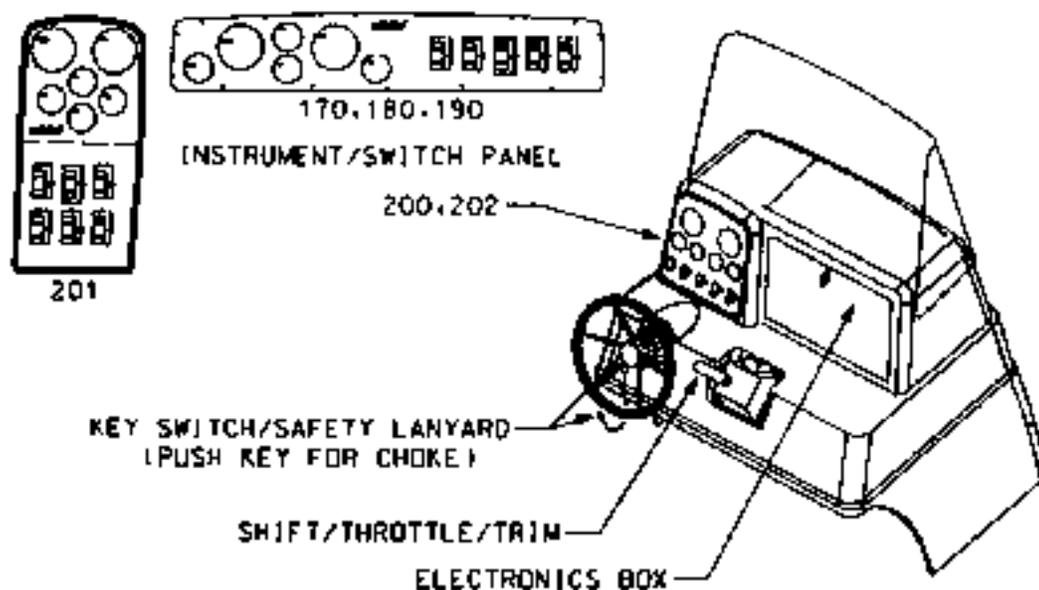

<Fig. 1 helm>

Safety Shut Down

The Safety shut down switch shuts off the engine in case the operator is thrown from the boat. To ensure proper function always attach the lanyard securely to the operator.

Shift/ Throttle/ Trim

Your Pro-Line can be ordered with several different shift/ throttle systems. Refer to the owner's packet to find the manual pertaining to your particular installation.

Steering

Your Pro-Line is equipped with a push pull cable or a hydraulic steering system. When the steering wheel is turned a cable is extended or retracted (or fluid is pumped to the steering cylinder), causing the boat to turn.

Periodically check the fluid level and top off if necessary. Beware of adding too much fluid especially if the ambient temperature is cold because expansion could cause leaking or damage to your system (refer to manual in packet). Every 24 hours of operation check all nuts, caps, and hose fittings for tightness. Check that the hoses or cables are not chafing, or kinking on sharp corners. Also check that ends are not damaged or distorted by clamps.

The fluid should be changed yearly under normal conditions, twice yearly for heavy use.

If your steering does not operate properly check the system for entanglement, then fluid level, and hoses / fittings for leaks, damage or corrosion.

Instruments

Your Pro-Line's instrumentation will vary from model to model and engine to engine, therefore the following descriptions are general - refer to your engine manual for specifics

Fuel Gauge

Differences in temperature, humidity, speed and trim can affect the actual accuracy of this gauge in service. It is important to verify the fuel flow in gal./hr. for your boat and make note of your gauge position with respect to time for different RPM settings. No gauge is 100% accurate. If you notice unusually high or low fuel consumption, investigate further to see if the engine is using more fuel than normal.

Water Temperature

The water temperature gauge indicates the internal water temperature of your engine. Your engine is equipped with a thermostat to quickly bring the engine up to its optimum operating temperature range of 150 to 170 degrees f. Some engines are also equipped with a audio alarm system indicating a overheat condition, if the gauge or alarm indicates a over heat condition immediately shut the engine off. Lift the drive and inspect water intakes for obstructions such as aquatic vegetation or mud. After finding the source of the overheating, restart engine and confirm water flow, if water does not flow within five seconds shut the engine off.

Volt

The volt meter indicates battery voltage, normal reading is between 12 to 15.5 volts. A low reading indicates too heavy of a load or a problem in the charging system. Too high of a voltage indicates a fault of the charging circuitry and continued operation will damage the battery.

Tachometer

The tachometer indicates the revolutions per minute (RPM) of your engine. Do not operate the engine beyond the limits stated in your engine manual. Abnormally low tach readings (for a given throttle setting) indicates loss of power or a prop entangled with weeds or trash. Check the prop first. A reading higher than normal indicates a ventilating or cavitating prop, or prop/drive damage.

Speedometer

The speedometer indicates the speed of your boat in Miles per hour (MPH).

The gauge operates by sensing water impact pressure from the pitot tube mounted on the transom, (or integrated into the lower drive unit). If the gauge fails to give a reading suspect a blocked pickup.

Trim

The trim gauge indicates the in (down) and out (up) position of the drive unit in relation to the hull. (see Trimming your boat p.17)

Options

Optional instrumentation for your Pro-Line includes fish locator/depth finder, VHF radio, GPS / LORAN navigation aids, etc. Refer to the manuals supplied.


Switches

Windshield Wiper

For operation in rain or adverse conditions, optional windshield wipers enhance visibility from the helm and therefore safety.

Bilge Pump

Your Pro-Line is equipped with an automatic bilge pump system with a manual override. The pump is located at the aft end of the bilge at the keel. The automatic float switch is wired directly to the battery terminal through an in-line fuse. Keep the bilge area clean and free from debris that could clog the pump. The helm switch overrides normal automatic operation. Breakers are located at the helm, fuses on the transom.

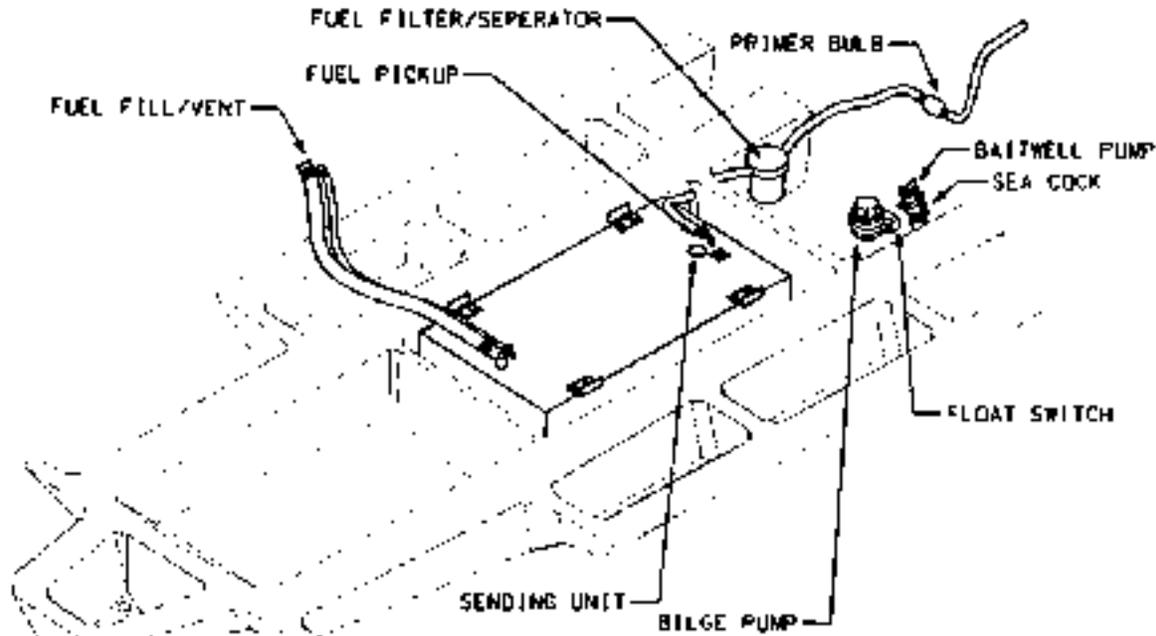

Lights

For operation at night your Pro-Line is equipped with navigation, and anchor lights to indicate your position to other boaters. While running after dark the nav lights are required to be on and visible to other boaters, visually verify operation and lack of obstructions.

Optional lights are also provided for the cockpit, bait well, helm and cabin, as well as spreader lights.

Breaker Switches

The wiring on your Pro-Line is protected by circuit breakers or fuses. If a device


stops working first suspect the circuit breaker is tripped, or fuse blown

A tripped breaker will protrude from its set position, indicating that the circuit has been overloaded. Turn off the device(s) on the circuit then reset the breaker by pushing in once. If the breaker does not reset or if it resets and then pops out again after the device is turned back on, then a short circuit exists or your device may be damaged, overloaded or faulty. Correct the problem and then reset the breaker. If the breaker continues to pop and you are certain the device, switch and wiring are in good repair, either the breaker is too small for the load or is faulty. Reduce the load or replace the breaker.

Systems

Sea Water System

The bait-well switch controls a pump. A hose directs flow to the bait well. If water does not flow check for a closed sea cock or a clog. Sea cocks on all below water line fittings should be closed when not in use.

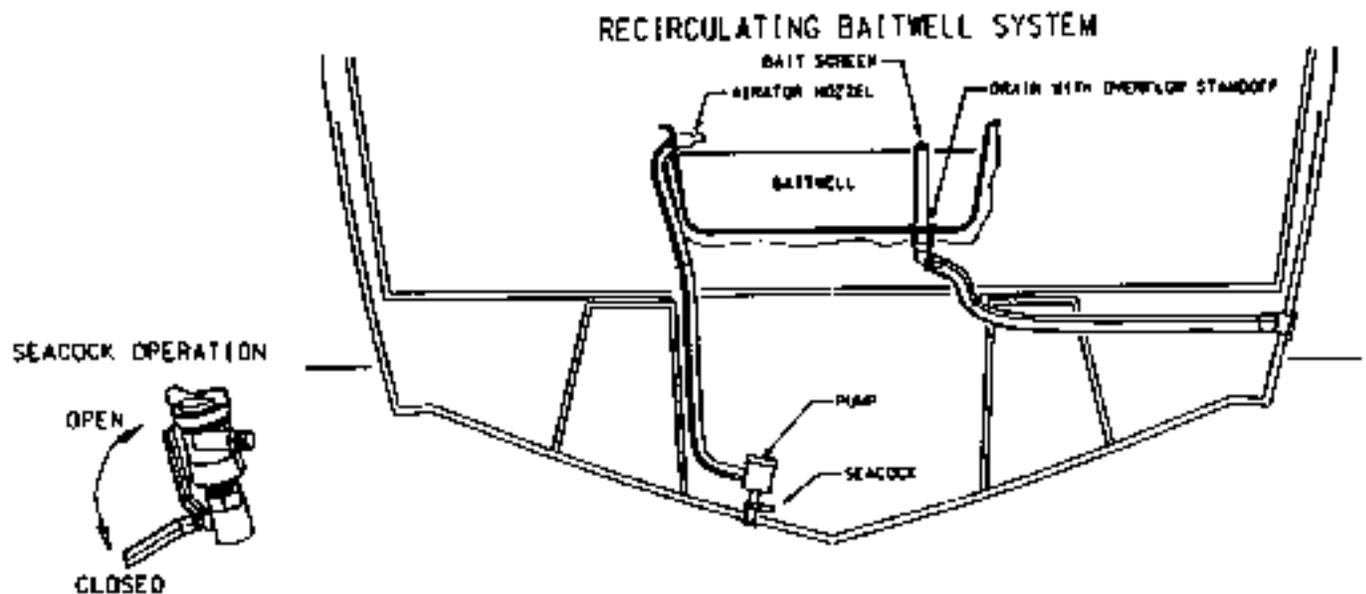

<Fig. 3 water system>

Head

If your Pro-Line is equipped with a portable head, refer to the manual supplied in your owner's packet.

Fuel / Oil System

The fuel tank on your Pro-Line is made of heavy gauge aluminum with internal baffling to minimize sloshing. The tank is vented overboard, inspect the vent for obstructions regularly. Deck plate access ports are placed over the hose connections and the sending unit. Inspect the hose connections on a regular basis, and if you see or smell fuel in the bilge.

Pro-Line boats equipped with oil injected outboard engines have an on board oil tank. Ensure that the tank is well stocked with the recommended two stroke oil. Refer to your engine manual. It is imperative that the oil supply remain clean and uncontaminated by water or dirt. Check to make sure that the oil lines are free from leaks, kinks, and chafing.

Electrical

Direct Current

12 volt direct current provides electrical power for all lighting, pumps, electronics, and DC devices. Fuses are located on the transom, breakers at the helm. Battery selector switches are on the transom for battery isolation, parallel operation and disconnect.

Trailer and Launching

Consult your trailer manufacture for specific information relating to your particular trailer. Pro-Line does not make or recommend the use of any particular trailer. Make sure the trailer you use is certified.

Consult your state authority for state regulations pertaining to trailering a boat.

Use the following towing check list:

- * Check brakes if equipped
- * Check springs and under carriage for cracks, loose parts and fasteners
- * Ensure tires are inflated to proper pressure, and in good condition
- * Check wheel bearings and lug nuts
- * Verify light and signal operation
- * Make sure boat is tied down from bow and stern eyes.
- * Stow bimini top and other items likely to blow off
- * Carry a spare tire and tools for changing (spare bearing and race set for long trips)
- * Securely brace O/B motors
- * Go slow over bumps
- * Check tires and hubs often for excessive heat, service if required
- * When backing have an assistant watch and guide with hand signals

Capacity

The trailer you choose should be a proper match for your boat with regard to capacity and hull design, consult your dealer when making your selection. The tow vehicle must have sufficient towing capacity for the combined load of boat, trailer and accessories. Check the certification label on the forward port (left) side of your trailer to ensure that it has adequate gross vehicle weight rating (GVWR) for the combined boat and trailer.

Hitch

Ensure that the hitch in the tow vehicle is rated for the GVW or greater, and that the ball size matches the trailer receiver.

Load Distribution

Generally speaking the tongue weight should be from 5 to 10% of the GVW. Make certain that the hull is evenly supported along the length and width with no load concentrations. Make sure that the bottom of the transom is supported and not hanging past the end of the trailer. Load the boat so it is centered side to side, and straight on the supports.

Launching and Retrieving

Pre- Launch Check List

- * Install drain plug
- * Remove covers and tie downs (leave bow winch strap in place)
- * Place fenders and fenders as needed.
- * Disconnect lights to avoid shorting
- * Verify that safety equipment is aboard

Launching

- * If possible use a lookout.
- * Back down the ramp until wheels are under water or the stern of the boat just starts to float (keeping perpendicular to the shore)
- * Loosen bow strap, board the boat, lower the drive unit
- * Start the engine and check the bilge for leaks
- * Remove winch strap from bow eye
- * Back boat off of trailer
- * Dock the boat and park the tow vehicle

Retrieving

- * Back down the ramp so trailer is half submerged
- * Carefully line up boat slowly maneuvering with short bursts of power
- * When the keel is centered and boat is just touching the trailer, winch (or smoothly apply power) until the boat eases to rest on the bow rest.
- * Secure the bow strap
- * Haul the boat out of the water and park out of the way of others
- * Remove the bilge plug
- * Rinse off salt water as soon as fresh water is available
- * Stow equipment and canvas, affix tie downs and covers
- * Hook up trailer lights and verify operation

Operation and Performance

Loading

The capacity plate states the maximum persons and the maximum weight in pounds for persons, engine and gear that the boat will safely accommodate under normal conditions. These load capacity ratings are computed using USCG formulas. For operation in rough and adverse conditions reduce the boats load to permit safe operation.

The performance of any boat is a function of the amount of load carried. Great loads reduce performance. Depending upon conditions and what engine / hull combination you have selected, your boat may not be able to stay on plane when loaded to its maximum rated capacity.

When loading your Pro-Line always

- * Maintain a balance both port to starboard and bow to stern
- * Keep heavy items as low as possible.
- * When boarding, step into the boat one person at a time (never jump)
- * Pass gear from the dock to someone in the boat. Do not carry gear while boarding.
- * Never allow passengers to ride with feet hanging over the side of the boat
- * Do not allow passengers to sit or stand on top of the stern or gunwales of the boat

Fueling

Due to the explosive nature of gasoline certain precautions must be observed when fueling up

Before Fueling

- * Secure the boat to the dock with adequate moorings
- * Turn off engine and any equipment having brush type (spark producing) contacts
- * Close cabin doors and hatches so fumes don't enter boat
- * **Disembark** all persons not necessary for the fueling operation
- * Prohibit all smoking and open flame on board and nearby
- * Have a fire extinguisher close by

While Fueling

- * Do not leave unattended
- * Do not spill fuel
- * Do not over fill. Filling a tank until fuel is vented is dangerous. Allow room for expansion

After Fueling

- * Close fill opening
- * Wipe up any spilled fuel. Dispose of rags on shore
- * Open cabin door, ventilate boat
- * Check for fumes in bilge, continue to ventilate if present
- * Verify proper fuel selector valve position (dual tanks only)

Starting

Follow the information in your engine manual if it deviates from the following instructions

Before Starting Engine

- * Ventilate all enclosed space
- * Visually inspect bilge for raw fuel, smell for vapors
- * Visually make sure propeller is clear of obstructions or swimmers
- * Make sure engine cooling water intakes are submerged
- * Lock helm seats to face straight forward

For a Cold Engine

- * Advance the throttle approximately 1/4 open (out of gear)
- * Activate the choke while cranking
- * Release the choke as engine smooths out (give a short burst if rough)

For a Hot Engine

- * Leave the throttle closed and choke off
- * If engine fails to start in 5 seconds, partially open throttle (out of gear) and try again
- * If flooded, keep throttle open for a few minutes and then crank. When engine starts close throttle smoothly as the engine clears to prevent over revving.

After your engine starts make sure to observe a few basic rules to ensure that the engine is functioning properly

- * Verify oil pressure and water circulation
- * Check the water temperature gauge for the first few minutes to make sure the engine is warming properly
- * Check for leaks especially fuel, stop the engine and correct if found.
- * Follow the break-in procedures for your engine
- * After engine is warm and after the necessary break-in, drive the boat at full throttle for a few moments (if conditions permit) to verify that the engine is developing full RPM

Torque


The twisting force that the engine applies to the prop lists the hull of your boat in the opposite direction the propeller is turning. For a large engine on light hull this

list can be considerable. A listing hull has more drag on the side that is deeper in the water causing boat to turn in the direction of the list. The trim tab on your out drive should be adjusted to counteract the torque steer for the load and speed the boat is most often operated at. Consult your engine manual for specific information on trim tab adjustment. Torque induced list can also be corrected by shifting the load in your boat. Twin engines, when counter rotating, cancel the torque and no correction is required.

Trim

The power trim system allows the operator to raise and lower the drive unit or motor through out a infinite number of settings between its upper and lower limits. For every throttle setting there is a trim setting that will yield optimal speed, stability or maneuverability.

For most conditions the best all-round performance is obtained when the bow of the boat is slightly out of the water.

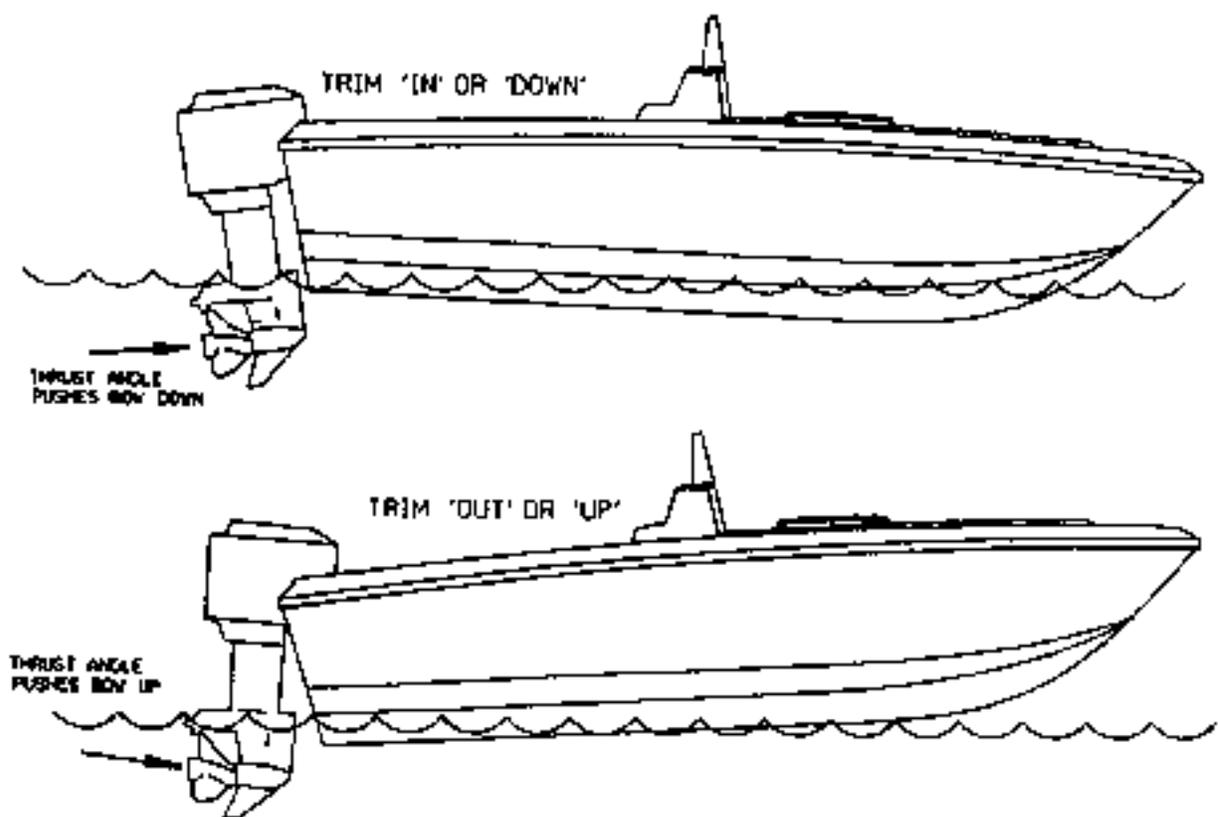

<Fig. 4 trim condition>

general trim down (or "in") characteristics are:

- * Starting position for best acceleration to plane
- * Lowers bow in the water providing better stability and ride in rough water
- * Reduces boat speed and economy due to increased drag of hull and drive
- * More spray over bow

General trim up (or "out") characteristics are:

- * Raises the bow of the boat in the water, resulting in less hull in the water
- * Greater speed and economy for a given throttle setting
- * Greater maneuverability (provided prop does not ventilate during the maneuver)
- * In excess, the reduced stability can lead to bouncing, porpoising and propeller ventilation

In addition to providing ideal boat performance, the power trim enables the motor or drive unit to be raised (tilted up) for trailering, beaching, and launching.

The electric motor that drives the hydraulic pump is protected by an internal thermal circuit breaker that interrupts the power when overheated. Avoid continued pressure on the switch after the unit has reached the limits of travel (you can hear the difference in sound as the pump strains against the increased load).

Prop

If your Pro-Line was ordered with a factory installed engine it will have a propeller that has been performance tested to provide the best all-round performance for your engine/hull combination at sea level.

In some situations it may be desirable to re-prop your Pro-Line to enhance desired performance needs. For instance:

- * Decreasing pitch will enhance acceleration and power at high loads
- * Increasing pitch will increase speed at light loads
- * Decreasing diameter will compensate for loss of power at high altitudes
- * Increasing diameter results in higher efficiency at low speeds at the expense of top speed and acceleration

When re-propping to a lower pitch or smaller diameter be sure not to over rev the engine at top speed, engine damage could result.

Operating your engine with a damaged prop will decrease top speed, increase fuel consumption and may introduce undesirable handling characteristics. The vibration caused by running a damaged prop could cause costly damage.

Service and Care

To enjoy trouble free use of your Pro-Line follow the recommended procedures and instructions relating to the service and care of your boat. Failure to follow the following maintenance practices will result in shorter life of your equipment and may void your warranty.

Much of the installed equipment on your Pro-Line is separately warranted. Follow the care instructions found in your owners packet to keep these warranties in force.

Your engine manual contains service information relating to your particular engine installation. Follow the provided recommendations for trouble free service and to preserve your warranty.

Fiberglass / Gel Coat

The fiberglass hull, inner liner, console, deck and some other molded components on your Pro-Line consist of a fiberglass shell integrated with a gel coat finish. The gel coat (perhaps colored) presents a smooth glossy surface finish that is associated with fiberglass. In areas receiving traffic the gel coat is molded with a rugged nonskid surface, in other areas it may be painted or striped with a accent for styling purposes.

For lasting shine keep your boat clean, wash all gel coated and painted surfaces regularly with clean fresh water, wax the surfaces to maintain the luster. If the boat is kept covered or out of the sun most of the time a seasonal waxing will suffice. For constant exposure to the sun frequent applications of wax will delay oxidation of the surface.

If the surface takes on a dull appearance that is not restoreable by waxing, hand buff with a rubbing compound such as Dupont No. 7, or power buff with Mirror-Glaze No. 1 then wax.

Caution: when power buffing use care not to leave swirl marks or "burn" the surface, you may want to leave this to a professional.

Gel coat surfaces are resistant to deep stains. Common surface stains can be removed with diluted household detergents, provided they don't contain ammonia, chlorine or abrasives. Do not use acetone or any ketone solvents, stubborn stains can be removed with alcohol or kerosene provided they are washed off promptly with mild detergent and water.

The gel coat on your Pro-Line is approximately 25 mil thick. If a deep gouge to the surface occurs that goes all the way through the gel coat into the fiberglass it must be repaired promptly to avoid further damage. Your dealer is best equipped to handle this repair and achieve good bonding and color match. There are many different gel coat repair kits on the market for this use, however, results obtained

may not be satisfactory.

Minor scratches and deep stains that do not penetrate the gel coat can be lightly wet sanded with 600 grit, buffed and waxed to remove.

For damage to fiberglass that goes deeper than 1/16 inch see your Pro-Line dealer.

Marine Growth

If marine growth is a problem consult your dealer about an anti fouling finish for the portions of the hull below water line. When moored in salt or brackish water it is recommended that you haul the boat out and scrub the bottom every 30 days to prevent great accumulation of marine growth.

Plexiglass

To clean plexiglass, rinse with fresh water to clean as much grime as possible. Use your bare hand with lots of water so you can feel any grit and avoid grinding it in to the surface as you dislodge it. A soft clean cloth may then be used with a non abrasive mild detergent. Rinse and blot dry with a clean dry chamois.

Grease and oil may be removed with kerosene, hexane or white gas (not gas you burn in your boat, car or lawnmower)

Never use solvents like acetone, silicone spray, benzine, carbon tetrachloride, dry cleaning fluid, lacquer or paint thinner, or any chlorinated solvent, on plexiglass, since they dissolve the material.

Stainless Steel / Aluminum

Stainless steel is used on bow rail and deck fittings on your Pro-Line. Stainless is corrosion resistant but not corrosion proof. If used in contact with sulfides, chloride salts or rusting metals stainless will show rust spots, discolor or corrode. The grain structure of stainless, when modified by welding processes has increased susceptibility to micro-corrosion (invisible to the unaided eye) and embrittlement. Proper care will preserve the weld strength and beauty of your stainless:

- * Always clean frequently with soap and water, most glass cleaners work well.
- * Always protect with a wax or oil film especially around welds to guard against micro-corrosion cracking and rust spots.
- * Always remove rust spots as they appear with brass, silver or chrome cleaner.
- * Never use coarse abrasives like sandpaper or steel wool on stainless, as these can cause rusting.
- * Never clean with acids or bleaches.
- * Never permit contact with iron, steel or other metal which could cause rust or corrosion.

Canvas

Cleaning: Brush the canvas with a soft bristle brush and hose down at regular

intervals to remove bird droppings, dust and dirt particles. It may be washed with a mild solution of Lux or Ivory soap and Borateem in lukewarm water (less than 100 deg. F.) **DO NOT USE DETERGENTS.**

For more stubborn stains soak the canvas in a solution of 4oz. clorox, 4oz. Ivory soap and one gallon warm water, for about 20 min. Rinse with cold water.

Note: If the water repellence is lost due to cleaning, apply a water repellent treatment as necessary.

The canvas may be washed in a automatic washing machine set on 'cold' using 2 cups bleach & 1 cup Ivory flakes. **DO NOT DRY IN A DRYER. LINE DRY**

ONLY to prevent shrinkage.

If canvas is dry cleaned re-treat with water repellent.

Storage: Do not fold or store any canvas while wet. All canvas should be rolled or folded when dry and kept in a clean dry location.

Upholstery

Vinyl

An occasional wipe down with mild soap and water is all your interior and exterior vinyls need to remain in good condition for many years. We do not recommend the use of any special cleaners, sealers or treatments for interior and exterior vinyls.

Refer to the provided brochure.

Fabric

For all fabrics Use dry cleaning fluid only.

Corrosion Protection

Your Motor / Drive unit has a sacrificial anode made of zinc to mitigate the effects of corrosion causing electrolysis. Maintain this anode in accordance with the maintenance schedule in your engine manual. If you moor your Pro-Line in salt water for extended periods make sure to check the anti corrosion anode often for operation, make sure the surface is exposed and not caked with corrosion and scale, if the anode is more than 50% eroded renew it.

Winterization and Storage

Pre-Storage Check List

- * Remove drain plug, keep bow high to drain any water accumulation.
- * Run a pint of RV antifreeze through bilge pump.
- * Drain all water from water systems and head, and pump an approved antifreeze through all pumps, valves, drains and lines.
- * Fill fuel tank and add a stabilizer/conditioner such as 'STA-BIL' to the gasoline.
- * Prepare the engine in accordance with manufacturer's recommendations found in your engine manual.
- * Treat metal parts with rust inhibitor.

- * Remove the battery and protect from freezing. Trickle charge overnight once a month
- * Place under cover, if on a trailer loosen tie down straps, and unload the tires with blocks

Fitting Out After Storage

- * Check entire fuel system for loose fittings, leaks and damage
- * Examine the exhaust system for rust, loose fittings, and leaks (recheck after starting engine)
- * Clean battery terminals, install battery(s), and coat terminals with deoxidizing agent
- * Check all through hull fittings and hoses for obstructions, water tightness and condition
- * Test navigation, anchor and other lights for operation
- * Check wiring, terminal blocks and plugs for loose connections and corrosion.
- * Verify switch and equipment operation
- * Check hie condition and inspect anchor and rode
- * Install hull drain plug, clean out any debris from bilge and cockpit
- * Remove antifreeze and flush water system

Appendix

Boat Identification Information

Owner: _____
Home Port: _____
Dealer: _____
Boat Name: _____
Registration No.: _____
Hull No.: _____
Boat Model: _____ LOA: _____ Beam: _____ Draft: _____
Vertical Clearance: _____ Weight: _____
Color: Hull: _____ Deck: _____ Interior: _____
Warranty Registration Date: _____
Fuel Capacity Gal.: _____
Ignition Key No.: _____
Radio Call Letters: _____ Bat. Voltage: _____
Engine Make & Model: _____ HP: _____
Engine S/N: _____
Drive S/N: _____
Prop: Dia: _____ Pitch: _____ P/N: _____

Trailer Make & Model: _____
Trailer S/N: _____ GVWR: _____

Insurance Company: _____
Agent: _____
Policy No.: _____ Phone No.: _____

Trouble Shooting Chart

Problem:

Boat speed or fuel economy

Possible Cause:

- *Wrong propeller for load or conditions
- *Trim too far
- *Hull dirty or forward or to heavy, or boat has taken on water
- *Machine growth on hull, line or anchor dragging
- *Fuel system or partially blocked, water system, out of tune, or underpowered
- *Improper rigging, air intake or exhaust partially blocked

Engine stalls that will not start

- *Safety shut down switch key not activated
- *Air or fuel filter is clogged, air or fuel tank fuel valve plugged
- *Water in fuel
- *Engine problem (electrical, fuel pump, blockage, etc.)

Engine will not crank

- *Clutch is in gear (check operation of the clutch release)
- *Battery is weak or terminals corroded or loose
- *Engine or drive damage

Engine runs but boat won't go

- *Clutch release is engaged
- *Disconnected shaft linkage
- *Damaged prop, or lower drive unit
- *Transom inclines or weeds or anchor is down

Prop cavitation

- *Trim set too far, motor too high
- *Weeds on prop
- *Low water, damage to hull

Excessive vibration

- *Propeller, engine or drive unit damaged
- *Hull damage

Boat won't turn

- *Steering unit seals fluid or has stopped, rudder is disconnected (check rudder)
- *Steering friction or mechanism jammed (check worm gear)

Electrical problems

- *Corroded wires, terminals, or plugs (see wiring diagram)
- *Broken, loose or shorted electrical wires
- *Circuit breaker tripped
- *Defective switch, device or breaker
- *Inline fuse blown out
- *Overloaded circuit

Handling problems like

Porpoises
Runs wet
Hard ride
Toss
Overbanking turns
Catches in turn

- *Trimmed out too far, damaged hull, cracked, trim tabs up, stern heavy
- *Trimmed in too far, bow heavy, trim tabs down, overloaded for operation
- *Stern heavy, trimmed in too far, gunn to lean for conditions
- *Loaded to one side, trim tabs set wrong, trimmed to lean, fuel tanks uneven
- *Trimmed in too far, improperly located load, throttle advanced too far
- *Damaged hull (hulls), stern seats, trim tabs down

Nautical Terms

Abeam: At 90 degrees to the center line of the boat – exactly to either side of the boat

Abaft: A point on a boat that is aft of another

Aft: Toward the rear of the boat

Beam: The widest part of the boat

Bilge: The lower interior of the hull

Bow: The fore part of a boat

Bulkhead: A vertical partition or reinforcement in a boat usually perpendicular to the keel

Chine: The juncture of the bottom and the side of the boat.

Check: Deck fitting used to guide a line

Cleat: Deck fitting used to secure a line to

Deck: Upper structure of a boat that covers the hull.

Draft: The distance the lowest part of the boat projects into the water

Fathom: A unit of measure equal to six feet

Freeboard: The height of the deck above the water line

Gunwale or Gunnel: The juncture of the side of the cockpit, deck and hull

Hatch: An opening used for access to an interior space

Head: Toilet or toilet area in a boat

Helm: Steering wheel or console area of a boat

Hull: The basic structure of a boat that provides flotation by displacing and excluding water

Keel: The major lengthwise member of the hull, the lowest portion of the hull

Knot: A measure of speed in nautical miles per hour, equal to 1.15 MPH

Lee: The side sheltered from the wind

Port: The left side of the boat when aboard the boat facing the bow

Scupper: Duct to drain water from the cockpit, often with a check valve to sea water intrusion

Sheer: The juncture of the deck and the hull, generally covered by the rub rail

Starboard: The right side of the boat when aboard the boat facing the bow

Stern: The aft end of the boat

Stern Drive: Inboard /outboard (I/O) drive unit

Stringer: Lengthwise reinforcing members of the hull


Transom: Vertical part of the stern.

Wake: Waves produced by a boat moving through the water

Windward: Toward the direction the wind is blowing from

Specifications:







Specifications subject to change without notice

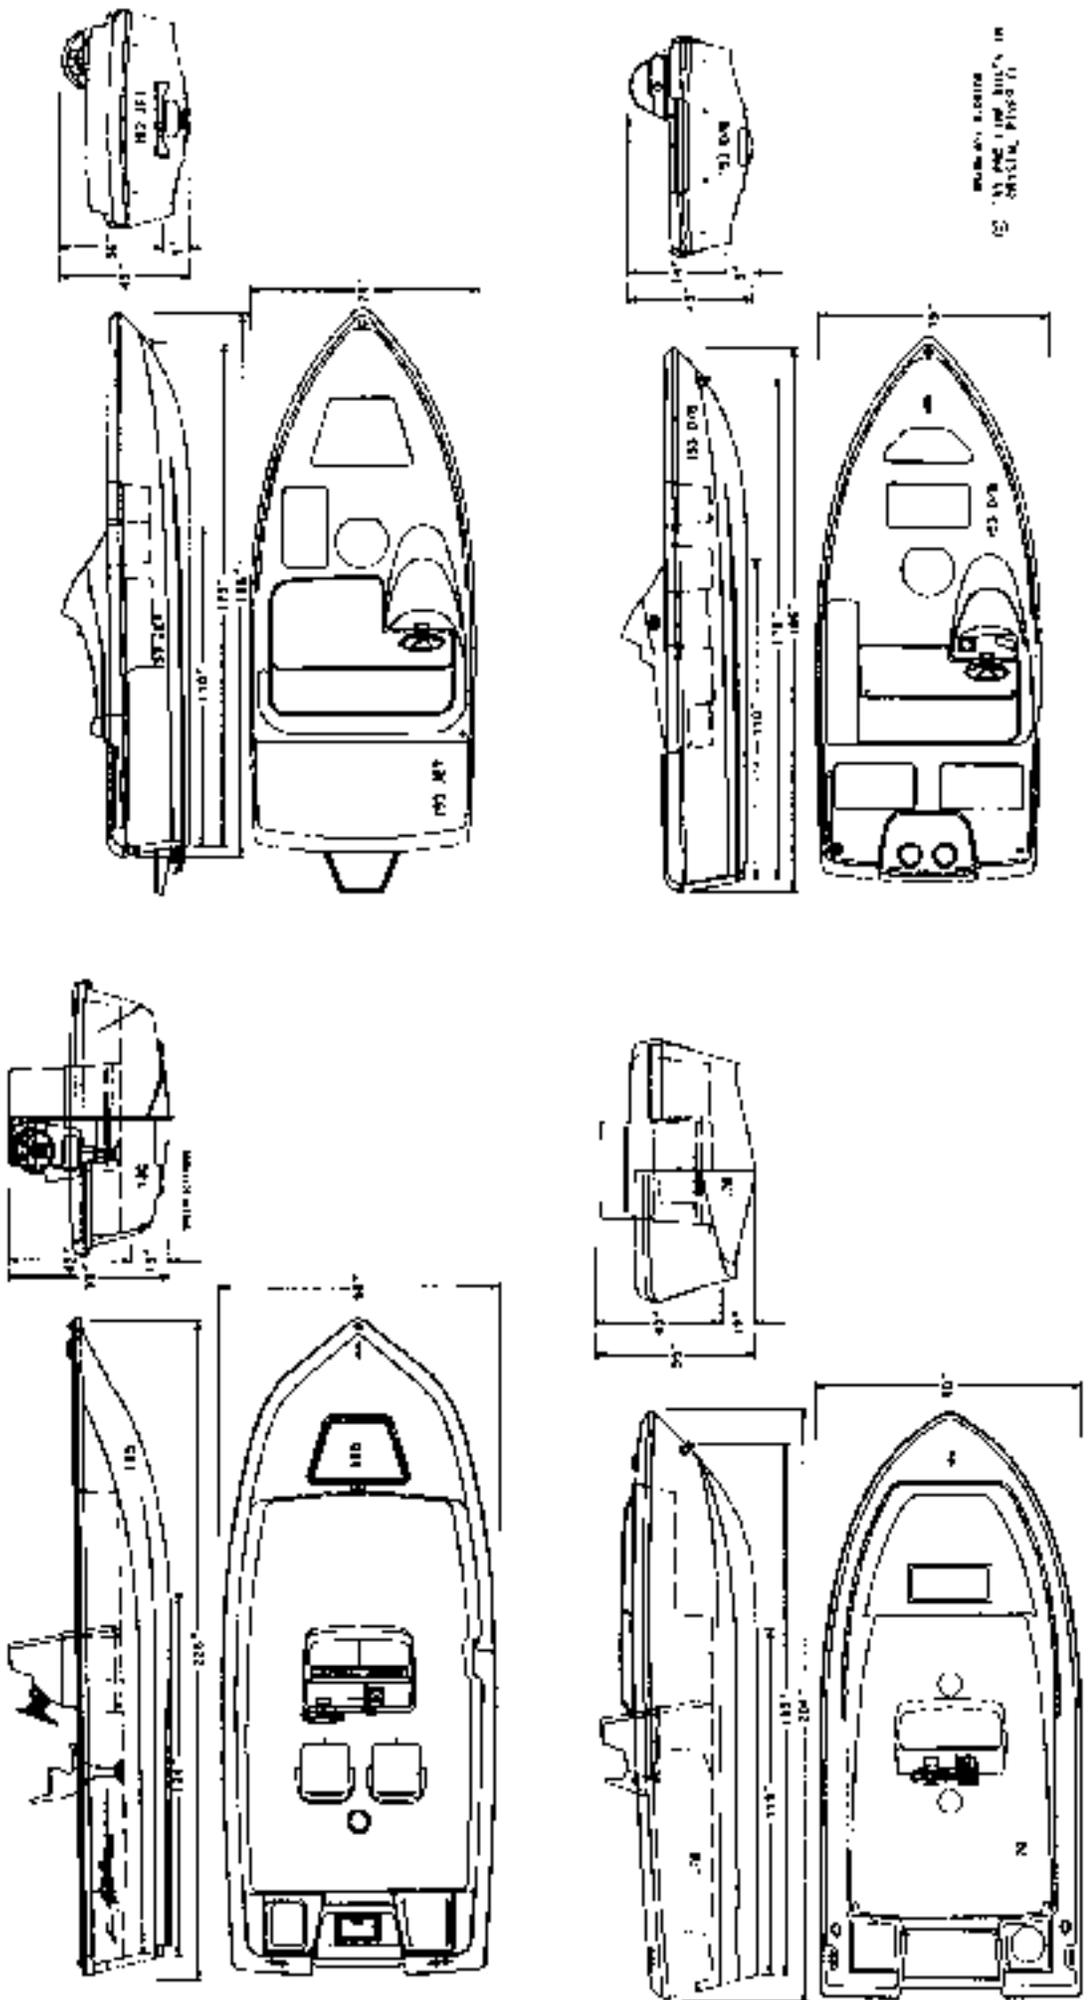

193 JET
193 JET
193 JET

Specifications:

Specifications subject to change without notice

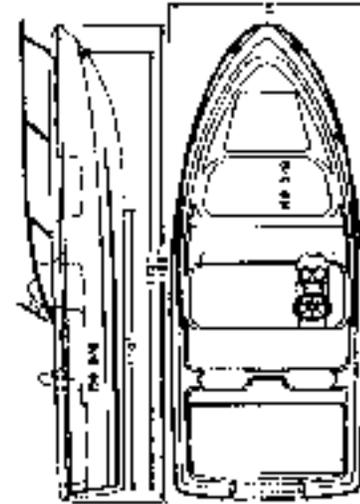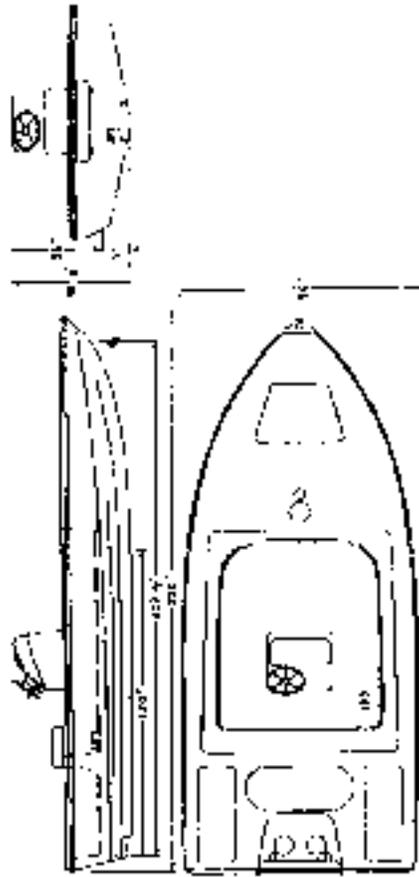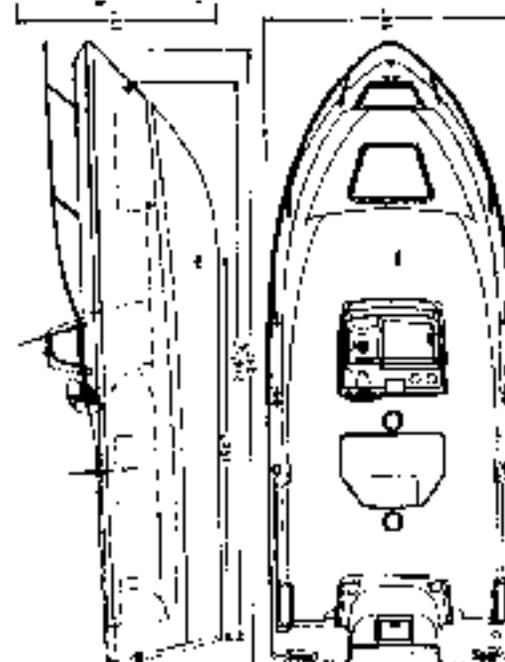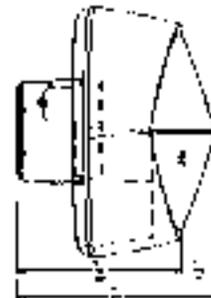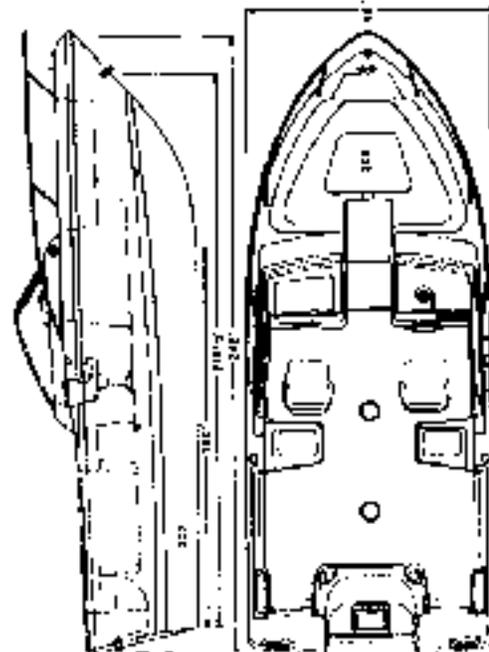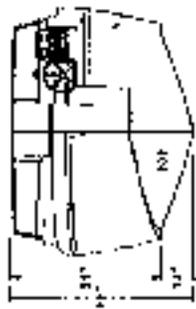

Model No. 1000
2000
2000

